

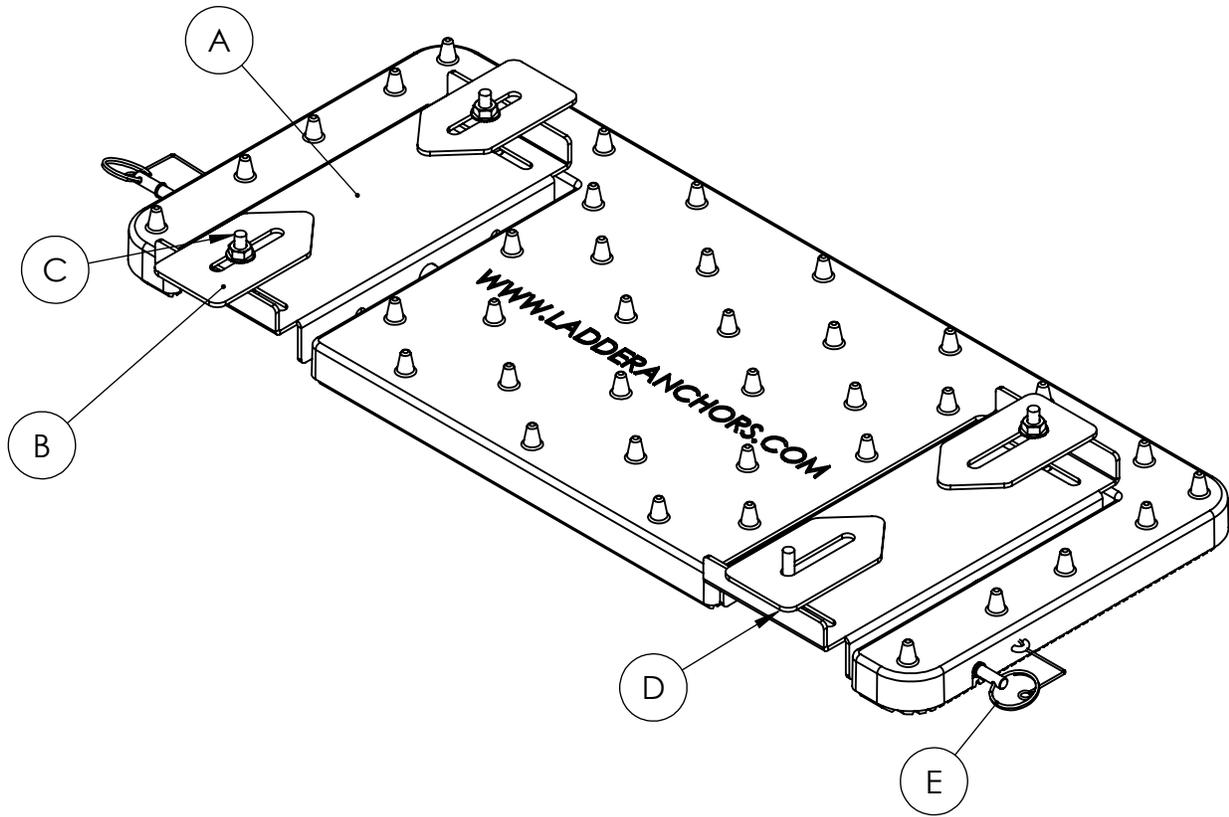


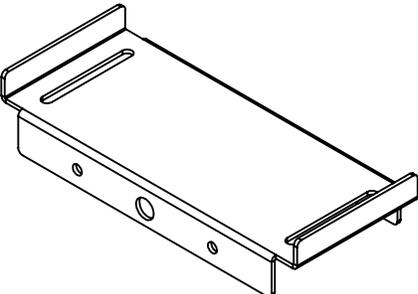

USER MANUAL

PARTS LIST



ITEM	NAME	QTY.	
A	ROTATING MOUNT	2	
B	RETAINING PLATE	4	
C	THREADED STUDS PLATE	2	
D	NUT	4	
E	PIN	2	

WARNINGS

 **DANGER**

Fall hazard. Failure to follow warnings or instructions can cause death or serious injury. Before using LadderAnchor the user must:

- **Read and obey all warnings and instructions for proper installation and safe use**
- **Be adequately trained in the safe operation of ladders and follow OSHA and ladder manufacturer's standards for safe ladder use**
- **Place on firm level surface**
- **Ensure ladder and LadderAnchor are free from defect or damage**

For more information visit LadderAnchors.com.

Improper use of the LadderAnchor creates a FALL HAZARD that can lead to serious injury or death.


- Before each use read and obey all warnings, installation instructions, and instructions for safe use.
- Failure to use the ladder properly creates fall hazards that can lead to death or serious injury. Ensure users are adequately trained in the safe operation of ladders.
 - Follow OSHA and ladder manufacturer's standards for safe ladder use and climbing practices
 - Always use three points of contact while climbing the ladder and always work facing the ladder.
 - Always wear proper slip resistant shoes when climbing ladder.
 - Never move, extend, or shift a ladder with user standing on it.
 - Do not reach out too far in any direction while standing on the ladder. Always keep your belt buckle (belly button) centered with ladder and be sure not to over reach.
- Failure to ensure the LadderAnchor is firmly secured to the ground can cause the ladder to fall, which can lead to death or serious injury.
 - Only use LadderAnchor on stable, level surface where LadderAnchor is firmly secured to the ground.
 - Do not place LadderAnchor on ice, gravel, wood chips, under water, or on loose or uneven ground.
 - Do not use ladder or LadderAnchor on rooftops, half walls, work platforms, mobile surfaces (*i.e.*, lifts, vehicles, etc.) or any thing other than the ground.
- Do not use LadderAnchor with a ladder without rotating feet.
- Do not use LadderAnchor near power lines or in inclement weather.
- Using damaged equipment can cause the ladder to fall resulting in death or serious injury.

- Check all equipment for defects or damage (*e.g.*, loose bolts, cracked plastic, broken cleats, damaged rubber, etc.) before each use. Do not use if you observe a defect or damage on equipment.
- Users must be age 18 or older.
- Do not use while under the influence of drugs or alcohol.
- LadderAnchor will provide replacement warning decals upon request. For more information, email info@LadderAnchors.com.


For more information about installation and safe use, or to view updates about this product visit LadderAnchors.com.

Install Instructions


1. Place the shoes of your ladder on top of the LadderAnchor rotating mounts. Center your ladder shoes on both mounts.

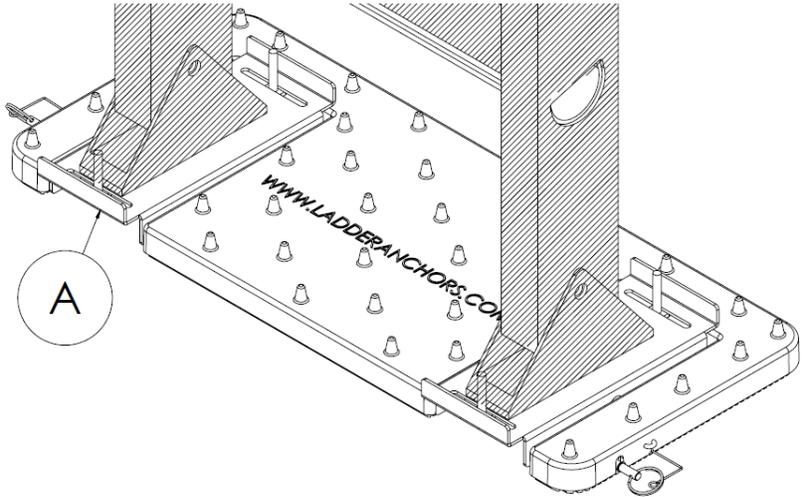


2. Place a retaining plate on top of your ladder shoe, so that the threaded studs are in the retaining plate slot. Center the angled section of the retaining plate in the shoe. Insert the retaining plate as far as possible into your ladder shoe.

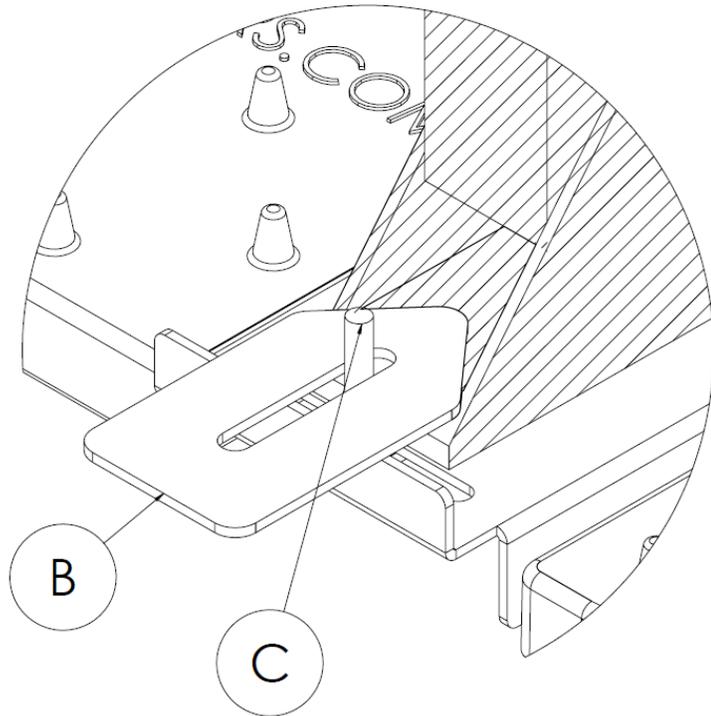


3. Thread the nut onto the stud to tighten the retaining plate down, clamping your ladder to the LadderAnchor. Tighten using a wrench.

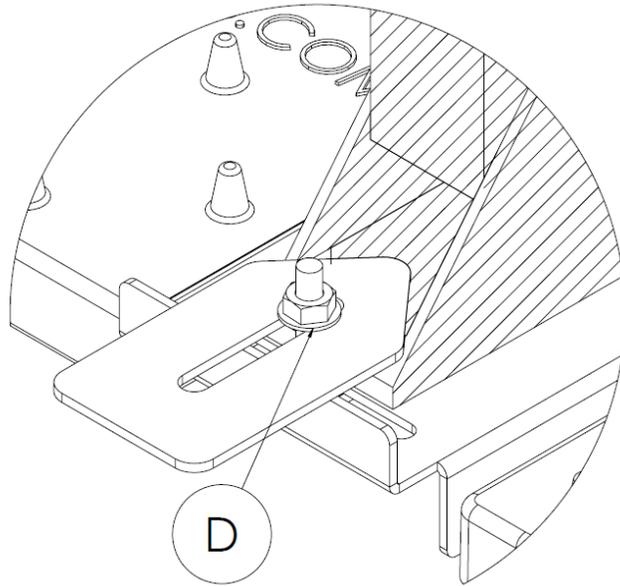

4. Repeat Step 3 for all four threaded studs on the LadderAnchor.

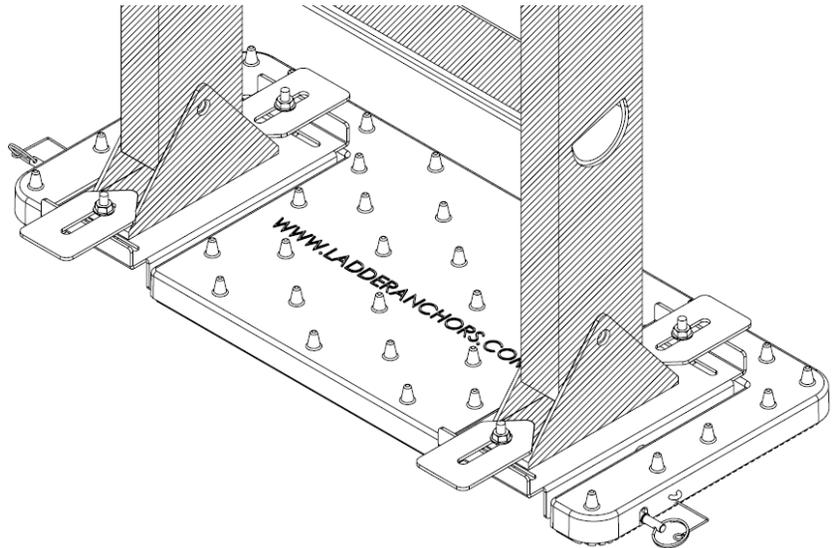

5. Always ensure that both pins are completely inserted and fully secured in the Shoe Mount.

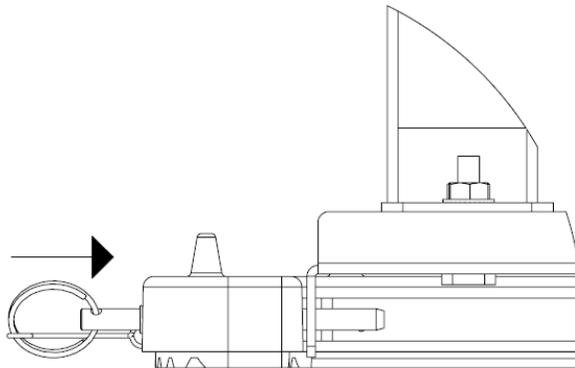

visit LadderAnchors.com/Install

Instructions For Safe Use of LadderAnchor

1. Read and obey all warnings and safety instructions before each use.
2. Ensure user is adequately trained in the safe operation of ladders.
3. Read installation instructions and ensure LadderAnchor is properly secured to ladder before each use.
4. Check all equipment for defects or damage (*e.g.*, loose bolts, cracked plastic, broken cleats, damaged rubber, etc.) before each use. Do not use if you observe a defect or damage on equipment.
5. Only use LadderAnchor on stable, level surface where LadderAnchor is firmly secured to the ground. Do not place LadderAnchor on ice, gravel, wood chips, under water, or on loose or uneven ground.
6. Select either the “cleat” or “non slip rubber” side of the LadderAnchor based on your ground surface. For soft surfaces that will allow penetration, use the cleat side. For hard surfaces, use the non slip rubber side.
7. Make sure the retaining pins are fully engaged through rotating mounts.
8. Follow OSHA and ladder manufacturer’s standards for safe ladder use and climbing practices
9. Always use three points of contact while climbing the ladder and always work facing the ladder.
10. Always wear proper slip resistant shoes when climbing ladder.
11. Never move, extend, or shift a ladder with user standing on it.
12. Do not reach out too far in any direction while standing on the ladder. Always keep your belt buckle (belly button) centered with ladder and be sure not to over reach.
13. Do not use LadderAnchor near power lines or in inclement weather.
14. Do not transport ladder with a LadderAnchor attached.

For more information visit LadderAnchors.com.

LADDERANCHOR LIMITED WARRANTY

The Product Foundry warrants its products to be free from defects in material and workmanship under normal use and service for a period of ONE YEAR from the date The Product Foundry originally manufactured the product. If any problem occurs with the product within the ONE YEAR warranty period, The Product Foundry has the discretion to replace or repair such products that are returned to The Product Foundry. The Customer has the burden and will need to show the problem occurred within ONE YEAR from the date The Product Foundry originally manufactured the product. Prior authorization from The Product Foundry is required for all returns. For return authorization and shipping information, contact us at:

info@ladderanchors.com. For more information, visit <https://www.ladderanchors.com/warranty>

This limited warranty shall not apply to any product that has been misused, repaired or modified. Likewise, this warranty shall not apply to any product not used in a manner consistent with its intended purpose and LadderAnchor's Instructions for Safe Use. Upon expiration of the ONE YEAR period, this product shall carry no warranty whatsoever.

Except as expressly provided above, The Product Foundry makes no, and hereby disclaims all, express warranties, implied warranties, statutory warranties, or warranties arising by custom or trade usage, including for example, but not limited to, the implied warranties of merchantability and fitness for a particular use or purpose. The Product Foundry further disclaims any warranty that the product will meet the requirements of the purchaser, operate as required by the purchaser, or operate error free.

By using the LadderAnchor product, the Customer accepts and acknowledges the terms of LadderAnchor's Limited Warranty. This warranty is also subject to the Limitation of Liability provision below.

LIMITATION OF LIABILITY

The Product Foundry shall not be liable for any direct, special, indirect, incidental, consequential, punitive or exemplary damages of any kind, even if The Product Foundry knew or had reason to know of the possibility of such damages. The Product Foundry hereby expressly disclaims all such damages. Notwithstanding the foregoing, The Product Foundry shall under no circumstances be liable for any consequential damages, losses, or expenses arising in connection with the use of, or inability to use, The Product Foundry's product for any purpose whatsoever. If for any reason any of the foregoing provisions shall be ineffective, any claim against The Product Foundry for damages arising out of its manufacture or sale of equipment, or use thereof, whether such liability is based on warranty, contract, negligence, strict liability, or otherwise, shall not in any event exceed the full purchase price of the product. Any action against The Product Foundry based upon any liability or obligation arising hereunder or under any law

applicable to the sale of equipment or use thereof, must be commenced within one year after the cause of action arises or is waived.